

Alu-Plano Exhibition Floor System

Light and stable,
height adjustable,
foldable



Alu-Plano exhibition floor system for bridging supply lines to compensate uneven floors and to install a stable, horizontal substructure for the stand construction. With the Alu-Plano exhibition floor system you assemble faster, personnel-saving and technically more accurate your exhibition floor. No matter how big and in what shape. Heights 9-13 cm and 16-20 cm. The aluminum frame construction protects the inlaying wooden plate and also enables an extraordinary high resilience.



KLEU®

Technical Details

Standard Size 100 cm x 100 cm

Load Capacity up to 10 kN

Weight incl. wooden plate 14 kg

Frame height 6 cm

Thickness wooden plate 22 mm

Minimum height 9 cm / 16 cm




Maximum height 13 cm / 20 cm

Lowest passage 3 cm

Largest passage 6 cm



The Alu-Plano exhibition floor is maintenance-free and has a practically unlimited shelf life. Thanks to the adjustable foot system, each element can be height-adjusted and readjusted even after it has been assembled. The foldable frames mean that only a little space is required for transporting and storing the material.

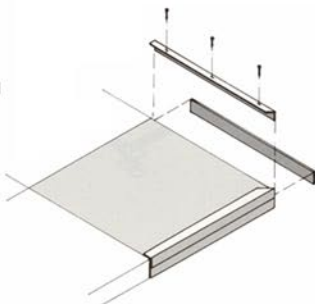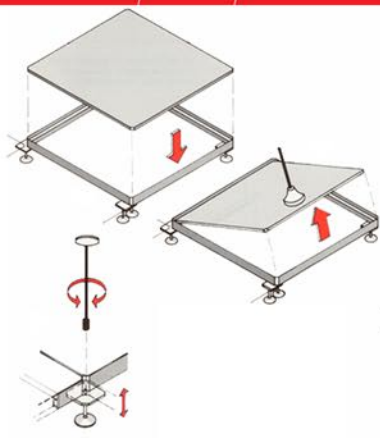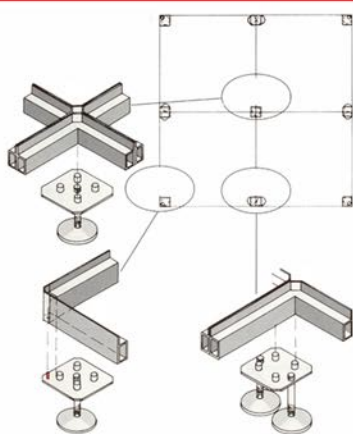

Alu-Plano exhibition floor system is extremely easy to assemble and dismantle. The feet for the central, edge and corner areas can also be adjusted after the floor has been set up. The adjusting screw is covered with a suitable plug. As a conclusion, the entire area is surrounded by a panel, which consists of angled and flat profile.

Diagonal or cross supporters can be installed to ensure greater stability of the floor.

There are many accessories such as ramps, transport boxes, etc. for the Alu-Plano exhibition floor system.



Bühnen · Podestsysteme · Messeboden

Podestbau Kleu GmbH · Rosenthalstraße 18 · 42369 Wuppertal

Tel.: 02058/89962 · Fax: 02058/899962

www.kleu.de · info@kleu.de