

Combi-Rail

and Combi-Junior rail

for stage curtains, accessories etc.



Areas of application

Theatres

Studios

Multipurpose halls


Schools

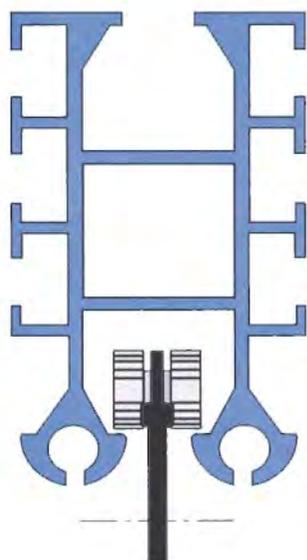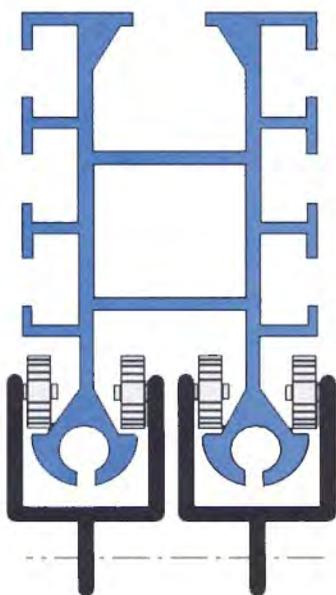

The 2-way Combi-Rail can be used universally. It is used to hold stage curtain rolls, trolleys and heavy duty castors.

Stage curtains, notices, alley scarves, backdrops, sliding walls and decorations can be attached.

The rail is supplied in natural aluminum as standard. Coatings are possible.

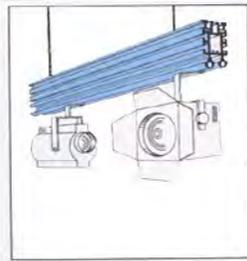

KLEU[®]

Bühnen · Podestsysteme · Messeboden

Podestbau Kleu GmbH · Rosenthalstraße 18 · 42369 Wuppertal

Tel.: 02058/89962 · Fax: 02058/89962

www.kleu.de · info@kleu.de



Rope connector /
Carrier



Stage curtain roller



Stage curtain roller,
also carrier



Stage trolley roller
with threadscrew




Zulässige Belastung bei einer Durchbiegung von L/200

Spannweite L (m)	2	2,5	3	3,5	4	4,5	5	5,5	6	7	8
max. Punktlast F (N)	9643	6135	4222	3063	2305	1781	1402	1117	897	581	365
max. Streckenlast q (N/m)	7712	3926	2252	1400	922	634	449	325	240	133	73
Durchbiegung f (mm)	10	12,5	15	17,5	20	22,5	25	27,5	30	35	40


Diese Werte sind gültig bei Verwendung als Träger auf zwei Stützen. Als Laststange für Prospektzüge nach DIN 56921 beträgt der max. Seilabstand 3460 mm.

Lots of accessories for attaching stage curtains etc. are available.

With the additional installation of a power rail, the Combi-Rail can be used to accommodate headlights. Both rails can be used as sling rails.

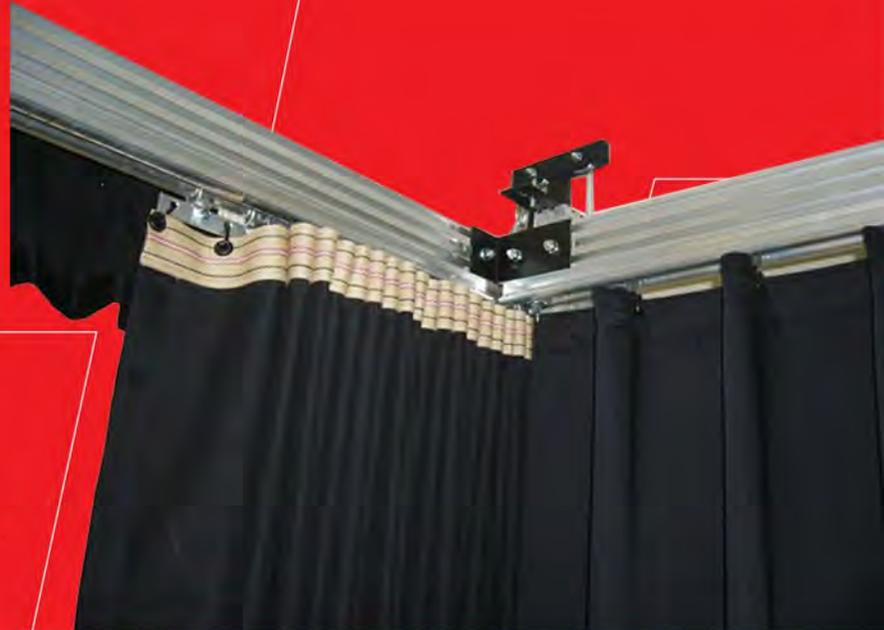

Combi-Rail with stage
curtain roller / stage
curtain rollers also as
carrier usable.



Combi-JUNIOR-Rail
with stage curtain rollers /
stage curtain roller also as
carrier usable.



Bühnen · Podestsysteme · Messeboden

Podestbau Kleu GmbH · Rosenthalstraße 18 · 42369 Wuppertal

Tel.: 02058/89962 · Fax: 02058/89962

www.kleu.de · info@kleu.de